


# Separable screw connections

## Elbow screw connections separable, both sides with female threads - conical sealing up to 25 bar

**Warning:** Version of the sealing surfaces and union nuts varies depending on the manufacturer. It is not recommended to mix individual parts.

Type 25 bar mall. cast iron galv.	a	c	Type 16 bar AISI 316 INOX	a	c	Thread
WT 38 ST	52	25	WT 38 ES	50	27	Rp 3/8"
WT 12 ST	58	28	WT 12 ES	58	27	Rp 1/2"
WT 34 ST	62	33	WT 34 ES	54	33	Rp 3/4"
WT 10 ST	72	38	WT 10 ES	74	40	Rp 1"
WT 114 ST	82	45	WT 114 ES	82	47	Rp 1 1/4"
WT 112 ST	90	50	WT 112 ES	87	52	Rp 1 1/2"
WT 20 ST	100	58	WT 20 ES	93	62	Rp 2"
WT 212 ST	122	70	---	---	---	Rp 2 1/2"
WT 30 ST	135	78	---	---	---	Rp 3"

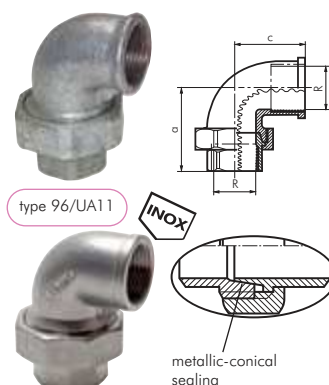


## Elbow screw connections separable, both sides with female threads - flat sealing up to 25 bar

**Materials:** Type malleable cast iron galvanised, Centellenseal included, type AISI 316: PTFE-seal included

**Warning:** Version of the sealing surfaces and union nuts varies depending on the manufacturer. It is not recommended to mix individual parts.

Type 25 bar mall. cast iron galv.	a	c	Type 16 bar AISI 316 INOX	a	c	Thread	Replacem. seal Centellen* for mall. cast iron	Replacem. seal PTFE for AISI 316
WT 38 F ST	52	25	WT 38 F ES	50	27	Rp 3/8"	WT 38 Di	DNT 38 Di TE
WT 12 F ST	58	28	WT 12 F ES	58	27	Rp 1/2"	WT 12 Di	DNT 12 Di TE
WT 34 F ST	62	33	WT 34 F ES	54	33	Rp 3/4"	WT 34 Di	DNT 34 Di TE
WT 10 F ST	72	38	WT 10 F ES	74	40	Rp 1"	WT 10 Di	DNT 10 Di TE
WT 114 F ST	82	45	WT 114 F ES	82	47	Rp 1 1/4"	WT 114 Di	DNT 114 Di TE
WT 112 F ST	90	50	WT 112 F ES	87	52	Rp 1 1/2"	WT 112 Di	DNT 112 Di TE
WT 20 F ST	100	58	WT 20 F ES	93	62	Rp 2"	WT 20 Di	DNT 20 Di TE
WT 212 F ST	122	70	---	---	---	Rp 2 1/2"	WT 212 Di	---


\* application area: water, steam, alcohol, glycol, flammable gases, hydrocarbon based oils

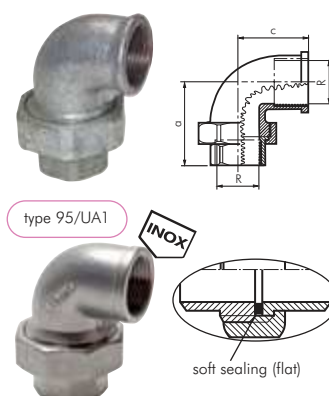

## Elbow screw connections separable with female and male threads - conical sealing up to 25 bar

**Warning:** Version of the sealing surfaces and union nuts varies depending on the manufacturer. It is not recommended to mix individual parts.

Type 25 bar mall. cast iron galv.	b	c	Type 16 bar AISI 316 INOX	b	c	Thread female	Thread male
WET 38 ST	65	25	WET 38 ES	61	27	Rp 3/8"	R 3/8"
WET 12 ST	76	28	WET 12 ES	72	27	Rp 1/2"	R 1/2"
WET 34 ST	82	33	WET 34 ES	69	33	Rp 3/4"	R 3/4"
WET 10 ST	94	38	WET 10 ES	89	40	Rp 1"	R 1"
WET 114 ST	107	45	WET 114 ES	98	47	Rp 1 1/4"	R 1 1/4"
WET 112 ST	115	50	WET 112 ES	102	52	Rp 1 1/2"	R 1 1/2"
WET 20 ST	128	58	WET 20 ES	111	62	Rp 2"	R 2"
WET 212 ST	152	70	---	---	---	Rp 2 1/2"	R 2 1/2"
WET 30 ST	168	78	---	---	---	Rp 3"	R 3"

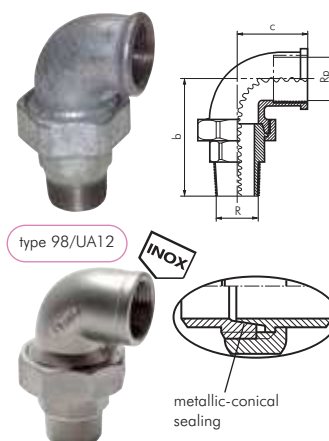


## Elbow screw connections separable with female and male threads - flat sealing up to 25 bar

**Materials:** Type malleable cast iron galvanised, Centellenseal included, type AISI 316: PTFE-seal included

**Warning:** Version of the sealing surfaces and union nuts varies depending on the manufacturer. It is not recommended to mix individual parts.

Type 25 bar mall. cast iron galv.	b	c	Type 16 bar AISI 316 INOX	b	c	Thread female	Thread male	Replacem. seal Centellen* for mall. cast iron	Replacem. seal PTFE for AISI 316
WET 38 F ST	65	25	WET 38 F ES	61	27	Rp 3/8"	R 3/8"	WT 38 Di	DNT 38 Di TE
WET 12 F ST	76	28	WET 12 F ES	72	27	Rp 1/2"	R 1/2"	WT 12 Di	DNT 12 Di TE
WET 34 F ST	82	33	WET 34 F ES	69	33	Rp 3/4"	R 3/4"	WT 34 Di	DNT 34 Di TE
WET 10 F ST	94	38	WET 10 F ES	89	40	Rp 1"	R 1"	WT 10 Di	DNT 10 Di TE
WET 114 F ST	107	45	WET 114 F ES	98	47	Rp 1 1/4"	R 1 1/4"	WT 114 Di	DNT 114 Di TE
WET 112 F ST	115	50	WET 112 F ES	102	52	Rp 1 1/2"	R 1 1/2"	WT 112 Di	DNT 112 Di TE
WET 20 F ST	128	58	WET 20 F ES	111	62	Rp 2"	R 2"	WT 20 Di	DNT 20 Di TE

\* application area: water, steam, alcohol, glycol, flammable gases, hydrocarbon based oils

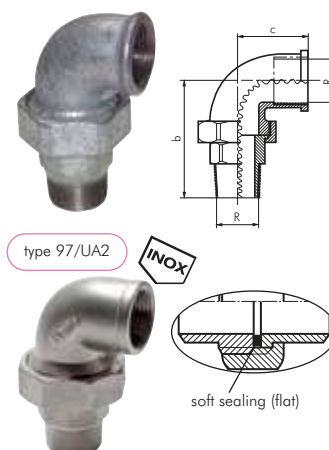

All data are considered to be unbinding reference values. We accept no liability for data selection that is not confirmed in writing. Pressure data refer, if not otherwise indicated, to liquids of Group II at +20°C.