


# Distributor blocks

2

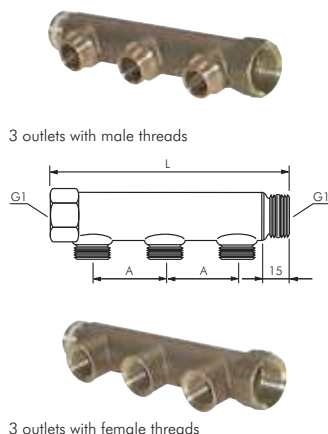

## Distributor pipes with male and female threads PN 10

**Materials:** Brass


**Operating range:** For the assembly of extraction points. The distributor may be extended as required since these are equipped with female and male threads.

Type	L	Type	L	Type	Thread G1 input (FT/MT)	Thread extraction point	A
<b>2 outlets</b>							
<b>3 outlets</b>							
<b>4 outlets</b>							
<b>With male thread on the extraction point</b>							
VTA 342 MS	110	VTA 343 MS	160	VTA 344 MS	210 G 3/4"	G 1/2" (MT)	50
VTA 102 MS	113	VTA 103 MS	163	VTA 104 MS	213 G 1"	G 1/2" (MT)	50
VTA 1142 MS	137	VTA 1143 MS	197	VTA 1144 MS	257 G 1 1/4"	G 1/2" (MT)	60
<b>With female thread on the extraction point</b>							
VTi 342 MS	110	VTi 343 MS	160	VTi 344 MS	210 G 3/4"	G 1/2" (FT)	50
VTi 102 MS	113	VTi 103 MS	163	VTi 104 MS	213 G 1"	G 1/2" (FT)	50
VTi 1142 MS	137	VTi 1143 MS	197	VTi 1144 MS	257 G 1 1/4"	G 1/2" (FT)	60

## Distributor pipes with male and female threads PN 10

**Materials:** Brass nickel-plated

**Operating range:** For the assembly of extraction points. The distributor may be extended as required since these are equipped with female and male threads.

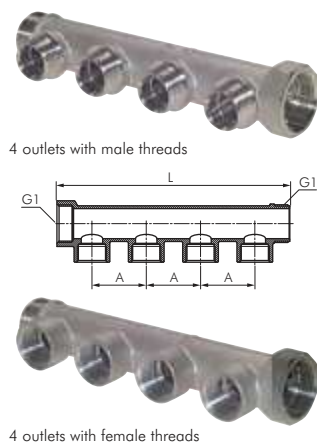

Type	L	Type	L	Type	Thread G1 Input (FT/MT)	Thread extraction point	A
<b>2 outlets</b>							
<b>3 outlets</b>							
<b>4 outlets</b>							
<b>With male thread on the extraction point</b>							
VTA 342 MSV	87	VTA 343 MSV	125	VTA 344 MSV	163 G 3/4"	G 1/2" (MT)	38
VTA 102 MSV	89	VTA 103 MSV	127	VTA 104 MSV	165 G 1"	G 1/2" (MT)	38
<b>With female thread on the extraction point</b>							
VTi 342 MSV	87	VTi 343 MSV	125	VTi 344 MSV	163 G 3/4"	G 1/2" (FT)	38
VTi 102 MSV	89	VTi 103 MSV	127	VTi 104 MSV	165 G 1"	G 1/2" (FT)	38




## Elbows connections PN 16




Type brass nickel-plated	Type brass	Type aluminium	Thread
GL 50 MSV	GL 50 MS	GL 50 A	M 5
GL 18 MSV	GL 18 MS	GL 18 A	G 1/8"
GL 14 MSV	GL 14 MS	GL 14 A	G 1/4"
GL 38 MSV	GL 38 MS	GL 38 A	G 3/8"
GL 12 MSV	GL 12 MS	GL 12 A	G 1/2"

## T-connections PN 16



Brass nickel-plated	Brass	Aluminium	Thread male	Thread female
FR 50 MSV	FR 50 MS	FR 50 A	M 5	2 x M 5
FR 18 MSV	FR 18 MS	FR 18 A	G 1/8"	2 x G 1/8"
FR 14 MSV	FR 14 MS	FR 14 A	G 1/4"	2 x G 1/4"
FR 38 MSV	FR 38 MS	FR 38 A	G 3/8"	2 x G 3/8"
---	---	FR 12 A	G 1/2"	2 x G 1/2"

**F** Dimensions can be found in the item details in our Online Shop!



## Cross distributor blocks PN 16

Type brass	L	W	H	Type aluminium	L	W	H	Thread
<b>3-way</b>								
FR 503 MS	14	14	8	---	---	---	---	3 x M 5
FR 183 MS	23	16	16	---	---	---	---	3 x G 1/8"
FR 143 MS	30	22	22	---	---	---	---	3 x G 1/4"
<b>4-way</b>								
VB 450 MS	14	14	8	VB 450 A	22	22	10	4 x M 5
VB 418 MS	23	16	16	VB 418 A	25	25	16	4 x G 1/8"
VB 414 MS	30	22	22	VB 414 A	40	40	20	4 x G 1/4"
---	---	---	---	VB 438 A	50	50	26	4 x G 3/8"
---	---	---	---	VB 412 A	50	50	32	4 x G 1/2"

All data are considered to be unbinding reference values. We accept no liability for data selection that is not confirmed in writing. Pressure data refer, if not otherwise indicated, to liquids of Group II at +20°C.