



Coded couplings NW 5



Compatible with**
Rectus 21, 90

Coded quick connect couplings (distinctive)

NW 5


Materials: Body: Brass or brass nickel-plated, sliding sleeve: Aluminium anodised, seals: NBR

Temperature range: -20°C to max. +100°C

Operating pressure: 0 - 35 bar as well as low vacuum

Flow*: 550 l/min

* 6 bar input pressure, 0.5 bar pressure difference

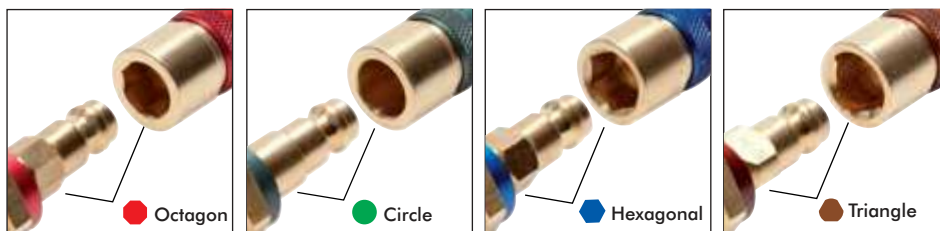

Coded coupling sockets with male threads

NW 5

Type red octagonal SW10	Type green circle 10.5	Type blue hexagonal SW10	Type brown triangle 9.5	Thread male
KDG 18 NW5-ROC	KDG 18 NW5-GRC	KDG 18 NW5-BLC	KDG 18 NW5-BRC	G 1/8"
KDG 14 NW5-ROC	KDG 14 NW5-GRC	KDG 14 NW5-BLC	KDG 14 NW5-BRC	G 1/4"

Coded coupling sockets with female threads

NW 5

Type red octagonal SW10	Type green circle 10.5	Type blue hexagonal SW10	Type brown triangle 9.5	Thread female
Plain brass				
KDG 18 NW5-ROC	KDG 18 NW5-GRC	KDG 18 NW5-BLC	KDG 18 NW5-BRC	G 1/8"
KDG 14 NW5-ROC	KDG 14 NW5-GRC	KDG 14 NW5-BLC	KDG 14 NW5-BRC	G 1/4"
Brass nickel-plated				
KDG 18 NW5 MSV-ROC	KDG 18 NW5 MSV-GRC	KDG 18 NW5 MSV-BLC	KDG 18 NW5 MSV-BRC	G 1/8"

Coded coupling sockets with hose nozzles

NW 5

Type red octagonal SW10	Type green circle 10.5	Type blue hexagonal SW10	Type brown triangle 9.5	Hose Ø internal
KDS 6 NW5-ROC	KDS 6 NW5-GRC	KDS 6 NW5-BLC	KDS 6 NW5-BRC	6
KDS 9 NW5-ROC	KDS 9 NW5-GRC	KDS 9 NW5-BLC	KDS 9 NW5-BRC	9

Coded coupling plugs with male threads

NW 5

Note: Coded coupling plugs also fit in uncoded coupling sockets

Type red octagonal SW10	Type green circle 10.5	Type blue hexagonal SW10	Type brown triangle 9.5	Thread male
Plain brass				
KSG 18 NW5-ROC	KSG 18 NW5-GRC	KSG 18 NW5-BLC	KSG 18 NW5-BRC	G 1/8"
KSG 14 NW5-ROC	KSG 14 NW5-GRC	KSG 14 NW5-BLC	KSG 14 NW5-BRC	G 1/4"
Brass nickel-plated				
KSG 18 NW5 MSV-ROC	KSG 18 NW5 MSV-GRC	KSG 18 NW5 MSV-BLC	KSG 18 NW5 MSV-BRC	G 1/8"

Coded coupling plugs with female threads

NW 5

Note: Coded coupling plugs also fit in uncoded coupling sockets

Type red octagonal SW10	Type green circle 10.5	Type blue hexagonal SW10	Type brown - triangle 9.5	Thread female
KSGi 18 NW5-ROC	KSGi 18 NW5-GRC	KSGi 18 NW5-BLC	KSGi 18 NW5-BRC	G 1/8"
KSGi 14 NW5-ROC	KSGi 14 NW5-GRC	KSGi 14 NW5-BLC	KSGi 14 NW5-BRC	G 1/4"

Coded coupling plugs with hose nozzles

NW 5

Note: Coded coupling plugs also fit in uncoded coupling sockets

Type red octagonal SW10	Type green - circle 10.5	Type blue hexagonal SW10	Type brown triangle 9.5	Hose Ø internal
KSS 6 NW5-ROC	KSS 6 NW5-GRC	KSS 6 NW5-BLC	KSS 6 NW5-BRC	6
KSS 9 NW5-ROC	KSS 9 NW5-GRC	KSS 9 NW5-BLC	KSS 9 NW5-BRC	9

Coded coupling plugs with hose nozzles & bulkhead threads

NW 5

Thread: M 12 x 1, Emax: 10

Note: Coded coupling plugs also fit in uncoded coupling sockets

Type red octagonal SW10	Type green - circle 10.5	Type blue hexagonal SW10	Type brown triangle 9.5	Hose Ø internal
KSSS 6 NW5-ROC	KSSS 6 NW5-GRC	KSSS 6 NW5-BLC	KSSS 6 NW5-BRC	6
KSSS 9 NW5-ROC	KSSS 9 NW5-GRC	KSSS 9 NW5-BLC	KSSS 9 NW5-BRC	9

** names and designations are partly registered trademarks of the respective manufacturer.

All data are considered to be unbinding reference values. We accept no liability for data selection that is not confirmed in writing. Pressure data refer, if not otherwise indicated, to liquids of Group II at +20°C.