


# Butt weld fittings

## T pieces with same outlet

## EN 10253 type A (DIN 2615)

Type AISI 316Ti <sup>INOX</sup>	Type AISI 321 <sup>INOX</sup>	Type AISI 316Ti <sup>INOX</sup>	Type AISI 321 <sup>INOX</sup>	Type P235GH-TC1 steel black	Connection D x S α
Welded design		Seamless design			
T1215GA6**	---	---	---	---	12.0 x 1.5 35
---	---	T17,223A6	---	---	17.0 x 2.3 20
T21,320GA6	T21,320GA4	T21,320A6	T21,320A4	T21,320ST	21.3 x 2.0 25
---	---	T21,329A6	T21,329A4	---	x 2.9
T26,920GA6	T26,920GA4	T26,920A6	---	---	26.9 x 2.0 29
---	---	T26,923A6	T26,923A4	T26,923ST	x 2.3
---	---	T26,929A6	T26,929A4	---	x 2.9
T33,720GA6	T33,720GA4	T33,720A6	T33,720A4	---	33.7 x 2.0 38
T33,726GA6	T33,726GA4	T33,726A6	T33,726A4	T33,726ST	x 2.6
T42,420GA6	T42,420GA4	T42,420A6	T42,420A4	---	42.4 x 2.0 48
T42,426GA6	T42,426GA4	T42,426A6	T42,426A4	T42,426ST	x 2.6
---	---	T42,429A6	T42,429A4	---	x 2.9
T48,320GA6	T48,320GA4	T48,320A6	T48,320A4	---	48.3 x 2.0 57
T48,326GA6	T48,326GA4	T48,326A6	T48,326A4	T48,326ST	x 2.6
---	---	T48,329A6	T48,329A4	---	x 2.9
---	---	T48,336A6	T48,336A4	---	x 3.6
T60,320GA6	T60,320GA4	T60,320A6	T60,320A4	---	60.3 x 2.0 64
T60,326GA6	T60,326GA4	---	---	---	x 2.6
T60,329GA6	T60,329GA4	T60,329A6	T60,329A4	T60,329ST	x 2.9
T76,123GA6	T76,123GA4	---	---	---	76.1 x 2.3 76
T76,125GA6	T76,125GA4	---	---	---	x 2.5
T76,129GA6	T76,129GA4	T76,129A6	T76,129A4	T76,129ST	x 2.9
T88,923GA6	T88,923GA4	---	---	---	88.9 x 2.3 86
T88,925GA6	T88,925GA4	---	---	---	x 2.5
T88,930GA6	T88,930GA4	---	---	---	x 3.0
---	---	T88,932A6	T88,932A4	T88,932ST	x 3.2
T114,326GA6	T114,326GA4	---	---	---	114.3 x 2.6 105
T114,330GA6	T114,330GA4	---	---	---	x 3.0
---	---	T114,336A6	T114,336A4	T114,336ST	x 3.6
T139,726GA6	T139,726GA4	---	---	---	139.7 x 2.6 124
T139,730GA6	T139,730GA4	---	---	---	x 3.0
---	---	T139,740A6	T139,740A4	T139,740ST	x 4.0
T168,326GA6	T168,326GA4	---	---	---	168.3 x 2.6 143
T168,330GA6	T168,330GA4	---	---	---	x 3.0
---	---	T168,345A6	T168,345A4	T168,345ST	x 4.5
T219,130GA6	T219,130GA4	---	---	---	219.1 x 3.0 178
---	---	T219,163A6	T219,163A4	T219,163ST	x 6.3

\* standard delivery program, \*\* DIN 11852/AISI 316L

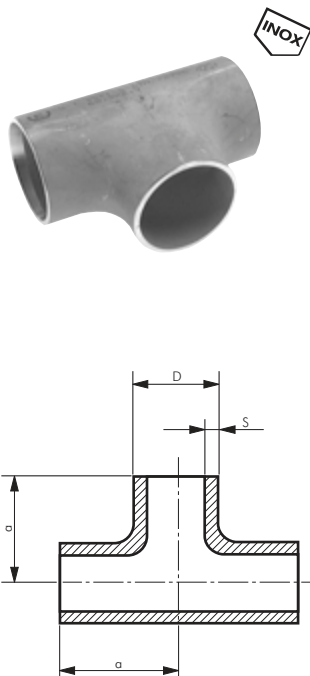

## Round steel U-bolt clamps

## DIN 3570, Form A

Supply volume: Round steel U-bolt clamps are delivered without shells and nuts.

Type zinc-plated steel	Type AISI 304 <sup>INOX</sup>	D	G	L	W	H
RSB 15*	RSB 15 ES*	21.3 (1/2")	M 8	20	30	46
RSB 18	RSB 18 ES	18	M 10	30	33	67
RSB 20*	RSB 20 ES*	26.9 (3/4")	M 8	20	35	54
RSB 25*	RSB 25 ES*	33.7 (1")	M 8	25	43	68
RSB 27	RSB 27 ES	25.0 - 26.9 (3/4")	M 10	40	40	70
RSB 32*	RSB 32 ES*	42.4 (1 1/4")	M 8	30	51	68
RSB 34	RSB 34 ES	30.0 - 33.7 (1")	M 10	40	48	76
RSB 40*	RSB 40 ES*	48.3 (1 1/2")	M 8	30	58	88
RSB 42	RSB 42 ES	38.0 - 42.4 (1 1/4")	M 10	50	56	86
RSB 48	RSB 48 ES	44.5 - 48.3 (1 1/2")	M 10	50	62	92
RSB 50*	RSB 50 ES*	60.3 (2")	M 10	35	71	90
RSB 60	RSB 60 ES	57.0 - 60.3 (2")	M 12	50	76	109
RSB 76	RSB 76 ES	76.1	M 12	50	94	125
RSB 89	RSB 89 ES	88.9	M 12	50	106	138
RSB 114	RSB 114 ES	108.0 - 114.3	M 16	60	136	171
RSB 140	RSB 140 ES	133.0 - 139.7	M 16	60	164	191
RSB 168	RSB 168 ES	159.0 - 168.3	M 16	60	192	217
RSB 194	RSB 194 ES	191.0 - 193.7	M 16	60	218	249
RSB 219	RSB 219 ES	216.0 - 219.1	M 20	70	248	283
RSB 273	RSB 273 ES	267.0 - 273.0	M 20	70	302	334
RSB 333	RSB 333 ES	318.0 - 332.9	M 20	70	352	385
RSB 368	RSB 368 ES	356.6 - 368.0	M 24	70	402	435
RSB 419	RSB 419 ES	406.4 - 419.0	M 24	70	452	487
RSB 521	RSB 521 ES	508.0 - 521.0	M 24	70	554	589

\* similar to DIN; we only recommend using them in restricted installation conditions

