

Service units, 2-part

Eco-Line

Version: Filter regulator, resettable (with relieving system) with attached lubricator
Materials: Body: Aluminium, spring hood: Polyamide, diaphragm and seals: NBR, container: Polycarbonate
Temperature range: Up to max. +60°C
Input pressure: 1.5 - 10 bar (regulation range: 0.5 - 8.5 bar)
Pore width in the filter: 5 µm
Media: Compressed air

- ✓ **Advantages:**
- Automatic venting in the event of overpressure on the secondary side
 - Hand wheel can be locked by pressing down on it
 - Mounting brackets included in the scope of delivery
 - Space saving compact pressure gauge already assembled
 - Can be filled with oil while under pressure

Type	Thread	Flow l/min	Max. oil volume cm ³	L	H1	H2	Model series
Manual drainage							
EiC 2010-02*	G 1/4"	1000	25	90	168	82	2
Semi-automatic drainage**							
EiC 3010-03	G 3/8"	2000	55	118	211	93	3
EiC 4010-04	G 1/2"	5100	135	154	263	112	4
EiC 5010-10	G 1"	6200	135	195	339	120	5
Automatic drainage with float**							
EiC 2010-02D*	G 1/4"	1000	25	90	206	82	2
EiC 3010-03D	G 3/8"	2000	55	118	225	93	3
EiC 4010-04D	G 1/2"	5100	135	154	265	112	4
EiC 5010-10D	G 1"	6200	135	195	341	120	5

* delivered without a protective cage. ** as soon as the input pressure falls below the minimum input pressure, the drain valve opens.

Replacement parts for air units

Eco-Line

Type	Description	Model series
Replacement filters for filters and filter regulators		
FILTER Ei2000	5 µm	2
FILTER Ei2000-25	25 µm	2
FILTER Ei3000	5 µm	3
FILTER Ei3000-25	25 µm	3
FILTER Ei4000	5 µm	4
FILTER Ei4000-25	25 µm	4
FILTER Ei5000	5 µm	5
FILTER Ei5000-25	25 µm	5
Replacement containers for filters and filter regulators, incl. O-ring		
BF Ei2000	Manual drain	2
BF Ei2000D	Automatic drain (float)*	2
BF Ei3000	Semi-automatic drain*	3
BF Ei3000D	Automatic drain (float)*	3
BF Ei4000	Semi-automatic drain*	4 - 5
BF Ei4000D	Automatic drain (float)*	4 - 5
Replacement container for mist lubricator, incl. O-ring		
BOL Ei2000		2
BOL Ei3000		3
BOL Ei4000		4 - 5
Replacement O-rings for sealing the container		
OR Ei2000		2
OR Ei3000		3
OR Ei4000		4 - 5
Inspection glass for mist lubricator, incl. O-ring		
TROPF EiL 2000		2
TROPF EiL 3000		3 - 5
Replacement pressure gauge 0 - 10 bar		
MANO EiR 10		2 - 5

* as soon as the inlet pressure falls below the minimum input pressure, the drain valve opens.


Mounting brackets/coupling kits

Eco-Line


Type	Model series
Coupling kits incl. wall bracket	
KP Ei2000	2
KP Ei3000	3
KP Ei4000	4
KP Ei5000	5
Mounting brackets for pressure regulators and filter regulators	
MW Ei2000	2
MW Ei3000	3
MW Ei4000	4 - 5
Panel union nut for pressure regulators and filter regulators	
SM Ei2000	2
SM Ei3000	3
SM Ei4000	4 - 5
Mounting brackets for filters and lubricators	
W Ei2000	2
W Ei3000	3
W Ei4000	4
W Ei5000	5

All data are considered to be unbinding reference values. We accept no liability for data selection that is not confirmed in writing. Pressure data refer, if not otherwise indicated, to liquids of Group II at +20°C.

Especially good value!

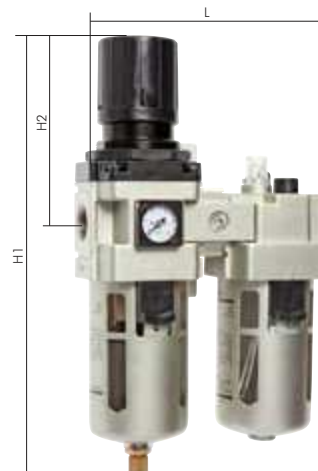

Especially good value!

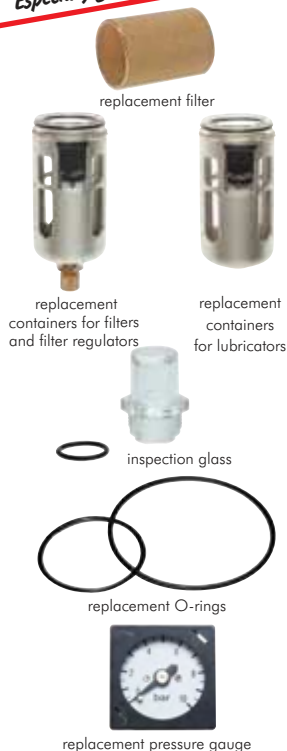

Especially good value!

