


Service units, 3-part, Futura model series 2

3500 l/min



Max. condensate amount: 49 cm

Switch panel thread: M 42 x 1.5

Supply volume: Air unit, including 50 mm pressure gauge

Oil metering at 1000 l/min: Approx. 1 - 2 drops/min

Oil supply: 80 cm³

Lubricator reaction limit (at 6 bar): 70 l/min

ATEX: Operating material without its own potential source of ignition in accordance with Directive 2014/34/EU

Optional: Version with metal container and inspection tube -M, automatic drain -AM, automatic drain closed without pressure (0 - 16 bar) -AMNC

Type	Thread	Pressure regula. range	Pressure gauge display	Mounting bracket	Coupling kit
CL 3823 F*	G 3/8"	0.5 - 8 bar	0 - 10 bar	W 2 F	KP 2 F or KPW 2 F
CL 3823-1 F	G 3/8"	0.1 - 1 bar	0 - 1.6 bar	W 2 F	KP 2 F or KPW 2 F
CL 3823-2 F	G 3/8"	0.1 - 2 bar	0 - 2.5 bar	W 2 F	KP 2 F or KPW 2 F
CL 3823-4 F	G 3/8"	0.2 - 4 bar	0 - 6 bar	W 2 F	KP 2 F or KPW 2 F
CL 3823-10 F	G 3/8"	0.5 - 10 bar	0 - 16 bar	W 2 F	KP 2 F or KPW 2 F
CL 3823-16 F	G 3/8"	0.5 - 16 bar	0 - 25 bar	W 2 F	KP 2 F or KPW 2 F
CL 123 F*	G 1/2"	0.5 - 8 bar	0 - 10 bar	W 2 F	KP 2 F or KPW 2 F
CL 123-1 F	G 1/2"	0.1 - 1 bar	0 - 1.6 bar	W 2 F	KP 2 F or KPW 2 F
CL 123-2 F	G 1/2"	0.1 - 2 bar	0 - 2.5 bar	W 2 F	KP 2 F or KPW 2 F
CL 123-4 F	G 1/2"	0.2 - 4 bar	0 - 6 bar	W 2 F	KP 2 F or KPW 2 F
CL 123-10 F	G 1/2"	0.5 - 10 bar	0 - 16 bar	W 2 F	KP 2 F or KPW 2 F
CL 123-16 F	G 1/2"	0.5 - 16 bar	0 - 25 bar	W 2 F	KP 2 F or KPW 2 F


* standard series, please use preferentially as the regulation range can be applied universally

Order example: CL 123 F **

Standard type


Designation for the options:

With metal container and inspection tube-M
With automatic drain-AM
With automatic drain, closed when depressurised (0 to 16 bar)-AMNC

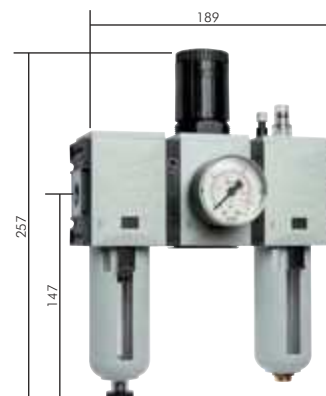

Service units, 3-part, Futura model series 4

12 000 l/min



Max. condensate amount: 87 cm³

Switch panel thread: M 50 x 1.5

Supply volume: Air unit, including 50 mm pressure gauge

Own air consumption: Max. 1.5 l/min

Oil metering at 1000 l/min: Approx. 1 - 2 drops/min

Oil supply: 181 cm³

Lubricator reaction limit (at 6 bar): 115 l/min

ATEX: Operating material without its own potential source of ignition in accordance with Directive 2014/34/EU

Optional: Version with metal container and inspection tube -M, automatic drain -AM, automatic drain closed without pressure (0 - 16 bar) -AMNC

Type	Thread	Pressure regula. range	Pressure gauge display	Mounting bracket	Coupling kit
CL 343 F*	G 3/4"	0.5 - 8 bar	0 - 10 bar	W 4 F	KP 4 F or KPW 4 F
CL 343-1 F	G 3/4"	0.1 - 1 bar	0 - 1.6 bar	W 4 F	KP 4 F or KPW 4 F
CL 343-2 F	G 3/4"	0.1 - 2 bar	0 - 2.5 bar	W 4 F	KP 4 F or KPW 4 F
CL 343-4 F	G 3/4"	0.2 - 4 bar	0 - 6 bar	W 4 F	KP 4 F or KPW 4 F
CL 343-10 F	G 3/4"	0.5 - 10 bar	0 - 16 bar	W 4 F	KP 4 F or KPW 4 F
CL 343-16 F	G 3/4"	0.5 - 16 bar	0 - 25 bar	W 4 F	KP 4 F or KPW 4 F
CL 103 F*	G 1"	0.5 - 8 bar	0 - 10 bar	W 4 F	KP 4 F or KPW 4 F
CL 103-1 F	G 1"	0.1 - 1 bar	0 - 1.6 bar	W 4 F	KP 4 F or KPW 4 F
CL 103-2 F	G 1"	0.1 - 2 bar	0 - 2.5 bar	W 4 F	KP 4 F or KPW 4 F
CL 103-4 F	G 1"	0.2 - 4 bar	0 - 6 bar	W 4 F	KP 4 F or KPW 4 F
CL 103-10 F	G 1"	0.5 - 10 bar	0 - 16 bar	W 4 F	KP 4 F or KPW 4 F
CL 103-16 F	G 1"	0.5 - 16 bar	0 - 25 bar	W 4 F	KP 4 F or KPW 4 F


* standard series, please use preferentially as the regulation range can be applied universally

Order example: CL 343 F **

Standard type

Designation for the options:

With metal container and inspection tube-M
With automatic drain-AM
With automatic drain, closed when depressurised (0 to 16 bar)-AMNC

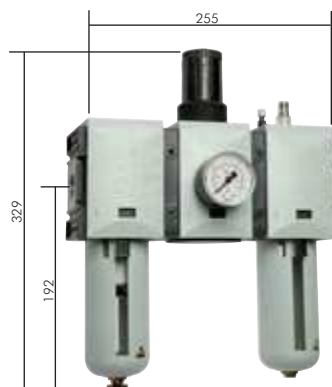

Service units of other manufacturers can be found in our Online Shop



Simply search using the manufacturer's item numbers.

Many additional products and sizes are available in our Online Shop!336