



Solenoid valves - Eco-Line


5/2-way and 5/3-way solenoid valves G 1/8"

Model series RV10

Power consumption: Direct current: 2,8 W, alternating current: 3 VA
Magnetic coil³⁾: S (plug size 0)

Type	Function	Thread	Flow	Symbol
5/2-way				
RV 5211-06 **	Spring return	G 1/8"	500 l/min.	
RV 5212-06 **	Pulse valve	G 1/8"	500 l/min.	
5/3-way				
RV 5312-06C **	Centre position closed	G 1/8"	450 l/min.	
RV 5312-06E **	Centre position vented	G 1/8"	450 l/min.	
RV 5312-06P **	Centre position ventilated	G 1/8"	450 l/min.	

** please enter required voltage, see order example, 3) magnetic coils and accessories from page 420



These valves are generally delivered with coils and plugs!


5/2-way and 5/3-way solenoid valves G 1/4"

Model series RV20

Power consumption: Direct current: 3 W, alternating current: 4 VA
Magnetic coil³⁾: T (plug size 1)

Type	Function	Thread	Flow	Symbol
5/2-way				
RV 5221-08 **	Spring return	G 1/4" (exhaust G 1/8")	800 l/min.	
RV 5222-08 **	Pulse valve	G 1/4" (exhaust G 1/8")	800 l/min.	
5/3-way				
RV 5322-08C **	Centre position closed	G 1/4" (exhaust G 1/8")	600 l/min.	
RV 5322-08E **	Centre position vented	G 1/4" (exhaust G 1/8")	600 l/min.	
RV 5322-08P **	Centre position ventilated	G 1/4" (exhaust G 1/8")	600 l/min.	

** please enter required voltage, see order example, 3) magnetic coils and accessories from page 420

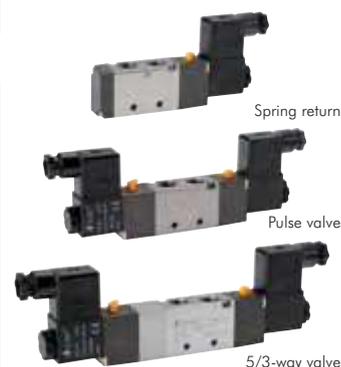

These valves are generally delivered with coils and plugs!


5/2-way and 5/3-way solenoid valves G 1/4"

Model series RV30

Power consumption: Direct current: 3 W, alternating current: 4 VA
Magnetic coil³⁾: T (plug size 1)

Type	Function	Thread	Flow	Symbol
5/2-way				
RV 5231-08 **	Spring return	G 1/4"	1150 l/min.	
RV 5232-08 **	Pulse valve	G 1/4"	1150 l/min.	
5/3-way				
RV 5332-08C **	Centre position closed	G 1/4"	850 l/min.	
RV 5332-08E **	Centre position vented	G 1/4"	850 l/min.	
RV 5332-08P **	Centre position ventilated	G 1/4"	850 l/min.	

** please enter required voltage, see order example, 3) magnetic coils and accessories from page 420

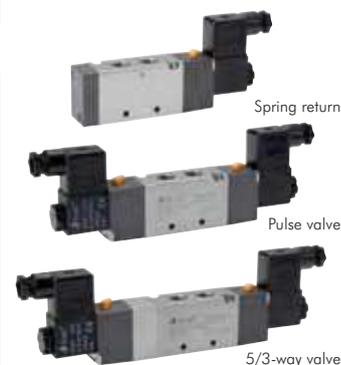

These valves are generally delivered with coils and plugs!

5/2-way and 5/3-way solenoid valves G 1/2"

Model series RV40

Power consumption: Direct current: 3 W, alternating current: 4 VA
Magnetic coil³⁾: T (plug size 2)

Type	Function	Thread	Flow	Symbol
5/2-way				
RV 5241-15 **	Spring return	G 1/2"	2250 l/min.	
RV 5242-15 **	Pulse valve	G 1/2"	2250 l/min.	
5/3-way				
RV 5342-15C **	Centre position closed	G 1/2"	1350 l/min.	
RV 5342-15E **	Centre position vented	G 1/2"	1350 l/min.	
RV 5342-15P **	Centre position ventilated	G 1/2"	1350 l/min.	

** please enter required voltage, see order example, 3) magnetic coils and accessories from page 420

Order example: V 5211-06 **

Standard type

Available voltage variants:

24V = (standard) -24V =
230V AC (standard) -230V
12V = -12V =
24V AC -24VAC



PU, PA, PTFE and PE hoses from page 192



These valves are generally delivered with coils and plugs!



Multiple manifolds can be found on page 423

All data are considered to be unbinding reference values. We accept no liability for data selection that is not confirmed in writing. Pressure data refer, if not otherwise indicated, to liquids of Group II at +20°C.