

Small cylinders ISO 6432/CETOP RP 52 P

F Pressure-force tables can be found on page 3

Especially good value!



Small cylinders ISO 6432/CETOP RP 52 P, double acting

Eco-Line

Materials: Head and foot: Aluminium anodised, cylinder tube: AISI 304, piston rod: AISI 303, seal: NBR
Temperature range: -20°C to max. +80°C
Operating pressure: Max. 10 bar


Piston Ø 16 mm	Piston Ø 20 mm	Piston Ø 25 mm	Stroke
ZDM 16/10 E	ZDM 20/10 E	ZDM 25/10 E	10
ZDM 16/25 E	ZDM 20/25 E	ZDM 25/25 E	25
ZDM 16/40 E	ZDM 20/40 E	ZDM 25/40 E	40
ZDM 16/50 E	ZDM 20/50 E	ZDM 25/50 E	50
ZDM 16/80 E	ZDM 20/80 E	ZDM 25/80 E	80
ZDM 16/100 E	ZDM 20/100 E	ZDM 25/100 E	100
ZDM 16/125 E	ZDM 20/125 E	ZDM 25/125 E	125
ZDM 16/160 E	ZDM 20/160 E	ZDM 25/160 E	160
ZDM 16/200 E	ZDM 20/200 E	ZDM 25/200 E	200
ZDM 16/250 E	ZDM 20/250 E	ZDM 25/250 E	250
---	---	ZDM 25/320 E	320
---	---	ZDM 25/400 E	400
---	---	ZDM 25/500 E	500

Order example: ZD M 16/ ** E

Standard type | Piston Ø/stroke

Order numbers suffixes:
Adjustable end position damping-P
Magnetic piston (standard)-M

F Pressure-force tables can be found on page 3

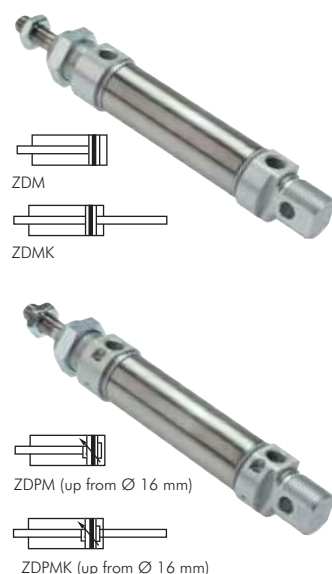

Small cylinders ISO 6432/CETOP RP 52 P, double acting

Materials: Head and foot: Aluminium anodised, cylinder tube: AISI 304, piston rod: AISI 303, seal: NBR/PUR
Temperature range: -20°C to max. +80°C
Operating pressure: Max. 10 bar
Optional: FKM seals (temperature range: -20°C to max. +150°C, without magnetic piston) -V, ATEX approval II 2GD c T5 T100° -20°C<Ta<80°C -X

Piston Ø 8 mm	Piston Ø 10 mm	Piston Ø 12 mm	Piston Ø 16 mm	Piston Ø 20 mm	Piston Ø 25 mm	Desired stroke/ standard stroke
ZDM 8/**	ZDM 10/**	ZDM 12/**	ZDM 16/**	ZDM 20/**	ZDM 25/**	1 to 1000
ZDM 8/10	ZDM 10/10	ZDM 12/10	ZDM 16/10	ZDM 20/10	ZDM 25/10	10
ZDM 8/25	ZDM 10/25	ZDM 12/25	ZDM 16/25	ZDM 20/25	ZDM 25/25	25
ZDM 8/40	ZDM 10/40	ZDM 12/40	ZDM 16/40	ZDM 20/40	ZDM 25/40	40
ZDM 8/50	ZDM 10/50	ZDM 12/50	ZDM 16/50	ZDM 20/50	ZDM 25/50	50
ZDM 8/80	ZDM 10/80	ZDM 12/80	ZDM 16/80	ZDM 20/80	ZDM 25/80	80
ZDM 8/100	ZDM 10/100	ZDM 12/100	ZDM 16/100	ZDM 20/100	ZDM 25/100	100
ZDM 8/125	ZDM 10/125	ZDM 12/125	ZDM 16/125	ZDM 20/125	ZDM 25/125	125
---	ZDM 10/160	ZDM 12/160	ZDM 16/160	ZDM 20/160	ZDM 25/160	160
---	---	ZDM 12/200	ZDM 16/200	ZDM 20/200	ZDM 25/200	200
---	---	---	ZDM 16/250	ZDM 20/250	ZDM 25/250	250
---	---	---	ZDM 16/320	ZDM 20/320	ZDM 25/320	320
---	---	---	ZDM 16/400	ZDM 20/400	ZDM 25/400	400
---	---	---	ZDM 16/500	ZDM 20/500	ZDM 25/500	500

Enter your required stroke here on your order! (taking into account the buckling load)

Order example: ZD M 16/ ** **

Standard type | Piston Ø/stroke

Designation for the options:
FKM seals-V
ATEX approval II 2GD c T5 T100° -20°C≤Ta≤80°C-X

Order numbers suffixes:
Adjustable end position damping (Ø 16, 20 and 25)-P
Magnetic piston (standard)-M
With hexagon piston rod (non-rotating) (Ø 16, 20 and 25)-O
Continuous piston rod (Ø 16, 20 and 25)-K
Extended piston rod by x mm-Lx

TIP We produce your desired stroke!

Service units FUTURA series from page 330

Festo cylinders can be found in our Online Shop

Coupling sockets NW7 from page 150

Threaded fittings from page 102

PU, PA, PTFE and PE hoses from page 192

One-way control valves from page 440

Pressure gauge from page 366

Valves from page 404

All data are considered to be unbinding reference values. We accept no liability for data selection that is not confirmed in writing. Pressure data refer, if not otherwise indicated, to liquids of Group II at +20°C.