

Accessories for Reservoirs



Fittings holders for reservoirs 200 ltr. and up

Supply volume: incl. safety valve, control flange and pressure gauge

Type	Type	Connection	Blow-off capacity	Operating pressure
standing holder	lying holder	thread	at max. pressure	
ARM TR 11 S	ARM TR 11 L	G 1/2" MT	485 m³/h	0 - 11 bar
ARM TR 16 S	ARM TR 16 L	G 1/2" MT	404 m³/h	0 - 16 bar

Seals for maintenance holes on compressed air reservoirs


Type	Size internal	Used for
DR MANN	320 x 420	Manhole
DR HAND	100 x 150	hand hole

Drain and venting valves with nozzles

PN 25

Materials: Body: Brass, seal: NBR
Temperature range: 0°C to max. +90°C

Type	G	DN
AB 18	G 1/8"	5
AB 14	G 1/4"	5




Drain and venting valves without nozzles

PN 10

Materials: Body: Brass chrome-plated, thread: With PTFE coating, hand wheel: Plastic
Temperature range: 0°C to max. +90°C

Type	Version	G
AB 18 B	With rotatable drainage nozzle	G 1/8"
AB 14 B	With fixed drainage nozzle	G 1/4"
AB 38 B	With fixed drainage nozzle	G 3/8"




Drainage valves with rings for compressed air reservoirs on vehicles

PN 20

Materials: Body and valve: Brass, ring: Brass nickel-plated, cone pressure spring: Stainless steel, seal: NBR
Temperature range: -40°C to +80°C


Type	Thread	SW
EWV 12 MS	G 1/2"	27
EWV 2215 MS	M 22 x 1.5	27



Rubber-metal buffers

Suitable: For sound absorption and vibration isolation
Materials: NR 55° shore with steel plate (zinc-plated).

Type	Type	Ø D	H	Thread
both sides	one side			
With threaded rod				
GPA 4020	GPD 4020	40	20	M 8 x 23
GPA 4030	GPD 4030	40	30	M 8 x 23
GPA 5020	GPD 5020	50	20	M 10 x 28
GPA 5030	GPD 5030	50	30	M 10 x 28
GPA 7525	GPD 7525	75	25	M 12 x 37
GPA 7550	GPD 7550	75	50	M 12 x 37
With female thread				
---	GPE 4020	40	20	M 8 (7 deep)
GPC 4025	---	40	25	M 8 (7 deep)
GPC 4030	GPE 4030	40	30	M 8 (7 deep)
---	GPE 5020	50	20	M 10 (8 deep)
GPC 5025	---	50	25	M 10 (8 deep)
GPC 5030	GPE 5030	50	30	M 10 (8 deep)
GPC 7525	GPE 7525	75	25	M 12 (10 deep)
GPC 7550	GPE 7550	75	50	M 12 (10 deep)

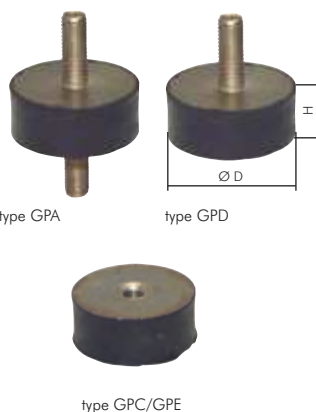

Rubber-metal buffers, parabolic

Suitable: For sound absorption, vibration isolation and stop damper
Materials: NR 55° shore with steel screw and steel plate (zinc-plated)

Type	Ø D	H	Thread
GPP 2024	20	24	M 6 x 18
GPP 3036	30	36	M 8 x 23
GPP 5058	50	58	M 10 x 28
GPP 7589	75	89	M 12 x 37
GPP 115136	115	136	M 16 x 42



All data are considered to be unbinding reference values. We accept no liability for data selection that is not confirmed in writing. Pressure data refer, if not otherwise indicated, to liquids of Group II at +20°C.