

tesa - Adhesives



Spray adhesive - tesa®

Suitable: For gluing on large areas

Contents: 500 ml


Туре	Temperature range	Material weight	Underground	d Application
TESA SPK EST	-30°C to +80°C	Heavy	Smooth, rough	"EXTRA STRONG" spray glue for up to 2 m², white colour, extremely leak-proof, strong bonding mass application, approx. 20 min. drying time, water resistant
TESA SPK PER	-20°C to +60°C	Medium	Uneven	"PERMANENT" spray glue for up to 4 m ² , beige colour, fine, uniform bonding mass application, suitable for polystyrene [®] , ap- prox. 10 min. drying time, water resistant

Rolle Type

Adhesive tapes - tesakrepp®

tesa 🖊

tesa 🖊

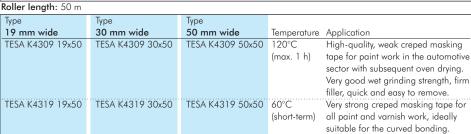



Electrical insulation tape with VDE-test seal

Coroplast

Application: Electrical insulation tape made of soft PVC (DIN EN 60454-3-1F-PVC/105/A-Tx Type 10) with VDE-test marks can be used for all normal insulation work, repairs of damaged insulations, taping cables etc. It is flame resistant and non-ageing, has a good resistance to chemicals (including operating resources of motor vehicles) and is wrinkle-free around the uneven areas.

Temperature range: -10°C to max. +105°C

Dielectric strength: >40 kV/mm Strap thickness: 0.15 mm

<u> </u>			
Type 15 mm band width	Type 25 mm band width	Type 50 mm band width	
(10 m roll)	(25 m roll)	(25 m roll)	Colour
ISOBAND 15x10 SCH	ISOBAND 25x25 SCH	ISOBAND 50x25 SCH	Black ●
ISOBAND 15x10 WE	ISOBAND 25x25 WE	ISOBAND 50x25 WE	White O
ISOBAND 15x10 RO	ISOBAND 25x25 RO	ISOBAND 50x25 RO	Red •
ISOBAND 15x10 GN	ISOBAND 25x25 GN	ISOBAND 50x25 GN	Green •
ISOBAND 15x10 BL	ISOBAND 25x25 BL	ISOBAND 50x25 BL	Blue 🔵
ISOBAND 15x10 GE	ISOBAND 25x25 GE	ISOBAND 50x25 GE	Yellow 🕒
ISOBAND 15x10 BR	ISOBAND 25x25 BR	ISOBAND 50x25 BR	Brown 🛑
ISOBAND 15x10 GG	ISOBAND 25x25 GG	ISOBAND 50x25 GG	Green-yellow 🌓





Anti-slip adhesive tape - tesa®

tesa /

Suitable: Very robust anti-slip adhesive tape with strong bonding force. Application indoors and outdoors e. g. on stairs, ramps, etc. It can be torn by hand, temperature resistant from -10°C to max. +50°C, sea water and UV resistant, resistant to many household cleaners.

Roller length: 15 m

Туре	Band width	Colour
TESA G60950-25S	25 mm	Black •
TESA G60950-50S	50 mm	Black ●
TESA G60951-50SG		Black-yellow •

available colours:









Screws/bolts, nuts, ent washers, fittings, O-ring assortments, etc. from page 596



Hydraulic pumps and electric motors can be found in the Online Shop



Flexible control cables on page 641

All data are considered to be unbinding reference values. We accept no liability for data selection that is not confirmed in writing. Pressure data refer, if not otherwise indicated, to liquids of Group II at +20°C

10