

Tube Stripper for Double Wall Tube

Cover Stripping Cutter for Double-Wall Tube.

Safety instructions for this product

Safety instructions, Common safety instructions for each product category and Detailed safety instructions for each product are in the end of this catalog and our website.

Model Designation (Example)

TSC
(1)

8
(2)

(1) Tube Stripper for Anti-spatter Tube

(2) Tube dia.

Code	6			
O.D. (mm)	ø6			
Applicable Tube type	RC-NFM6/4G-500-8			

RoHS2 (2011/65/EU+EU2015/863) compliant

Tube Stripper for
PVC DW Tube

Model Code

TSC



TSC6



specifications



1 pc. /bag

Characteristics


Peels only the PVC flame retardant cover like sharpening a pencil to fit the insertion dimensions of our Double Wall Tube fittings.

Push-in fitting		Speed controller		Flow controller
Tube Fitting Anti-spatter	Tube Fitting Brass	Speed Controller Anti-spatter	Speed Controller Brass	Needle Valve Brass



Peels only the PVC flame retardant cover without damaging the inner tube. The transparent cover enables to check cutting progress easily.

How to use the Cutter

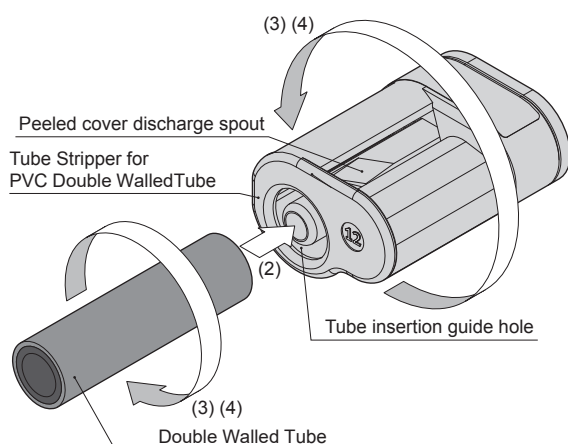

- (1) When cutting an D/W PVC Tube , make sure to form the cut end surface of the tube orthogonally.
- (2) Insert an Tube from tube insertion guide hole until it hits the blade.
- (3) Insert the Tube further with rotating the tube or Tube Stripper for Tube clockwise until the tubing edge hits the end in the peeler.
- (4) Keep rotating the tube or the stripper until the cover gets stripped completely, and then take out the tube from the stripper.

*Rotate either PVC D/W tube or Tube Stripper for PVC D/W Tube whichever earlier to rotate.

Related products



Double-Wall Tube 8mm O.D
Outer X 6mm O.D Inner