

Coded quick connect couplings (distinctive)

NW 7.2

Materials: Body: Brass, sliding sleeve: Aluminium anodised, seals: NBR

Temperature range: -20°C to max. +100°C

Operating pressure: 0 - 35 bar as well as low vacuum


Flow*: 1800 l/min

* 6 bar input pressure, 0.5 bar pressure difference



Compatible with**

Rectus 25, 26,
1600, 1625

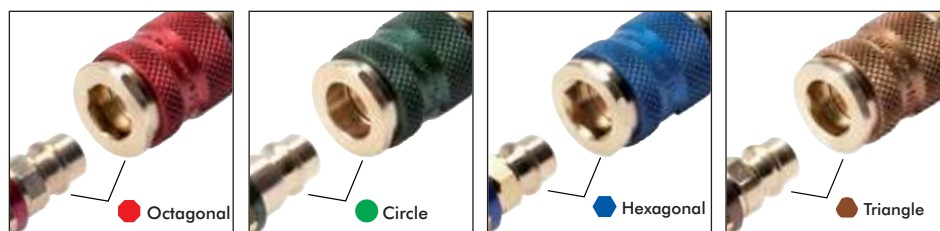

Coded coupling sockets with male threads, ball locks

NW 7.2

Note: Uncoded coupling plugs also fit in coded coupling sockets

Type red octagonal SW12	Type green circle 12.5	Type blue hexagonal SW12	Type brown triangle 12.5	Thread male
KDG 14 NW7 ST-ROC	KDG 14 NW7 ST-GRC	KDG 14 NW7 ST-BLC	KDG 14 NW7 ST-BRC	G 1/4"
KDG 12 NW7 ST-ROC	KDG 12 NW7 ST-GRC	KDG 12 NW7 ST-BLC	KDG 12 NW7 ST-BRC	G 1/2"



Coded coupling sockets with female threads, ball locks

NW 7.2

Note: Uncoded coupling plugs also fit in coded coupling sockets

Type red octagonal SW12	Type green circle 12.5	Type blue hexagonal SW12	Type brown triangle 12.5	Thread female
KDGi 14 NW7 ST-ROC	KDGi 14 NW7 ST-GRC	KDGi 14 NW7 ST-BLC	KDGi 14 NW7 ST-BRC	G 1/4"



Coded coupling sockets with hose nozzles, ball locks

NW 7.2

Note: Uncoded coupling plugs also fit in coded coupling sockets

Type red octagonal SW12	Type green circle 12.5	Type blue hexagonal SW12	Type brown triangle 12.5	Hose Ø internal
KDS 9 NW7 ST-ROC	KDS 9 NW7 ST-GRC	KDS 9 NW7 ST-BLC	KDS 9 NW7 ST-BRC	9



Coded coupling plugs with male threads

NW 7.2

Type red octagonal SW12	Type green circle 12.5	Type blue hexagonal SW12	Type brown triangle 12.5	Thread male
KSG 14 NW7-ROC	KSG 14 NW7-GRC	KSG 14 NW7-BLC	KSG 14 NW7-BRC	G 1/4"



Coded coupling plugs with female threads

NW 7.2

Type red octagonal SW12	Type green circle 12.5	Type blue hexagonal SW12	Type brown triangle 12.5	Thread female
KSGi 14 NW7-ROC	KSGi 14 NW7-GRC	KSGi 14 NW7-BLC	KSGi 14 NW7-BRC	G 1/4"



Coded coupling plugs with hose nozzles

NW 7.2

Type red octagonal SW12	Type green circle 10.5	Type blue hexagonal SW12	Type brown triangle 12.5	Hose Ø internal
KSS 9 NW7-ROC	KSS 9 NW7-GRC	KSS 9 NW7-BLC	KSS 9 NW7-BRC	9



LOCTITE
Liquid seals,
gaskets & tapes
from page 549



Compressed air
rubber hoses
from page 212



Service units
FUTURA series
from page 330



Cylinder
from page 460

** names and designations are partly registered trademarks of the respective manufacturer.

All data are considered to be unbinding reference values. We accept no liability for data selection that is not confirmed in writing. Pressure data refer, if not otherwise indicated, to liquids of Group II at +20°C.